



UNADA COMMUTATED EC MOTOR

Bottle Coolers | Display Cases
Ventilation


DATASHEET UC Sync Refrigeration Fan Motor




SPECIFICATION

Rated voltage	120 / 230-240Vac, 50/60Hz
Temperature range	-40°C to +50°C
Rated current	0.4A / 0.25A
Efficiency	≤ 70%
Output power	0 – 16W
Rated speed	50Hz : 1500rpm / 60Hz : 1800rpm
Speed selection	Synchronous options.
Direction of rotation	CCW, CW
Reverse Speed	Timed reverse programmable options.
Motor Protection	Electrically Protected (EP)
Ground Protection	Double Insulation
Insulation Class	Class B
Bearing	608 sealed ball bearings
Approvals	UL / TÜV / CE / RCM / CCC (Pending)
Ingress protection	IP55

PERFORMANCE : 50Hz / 1500rpm Synchronous

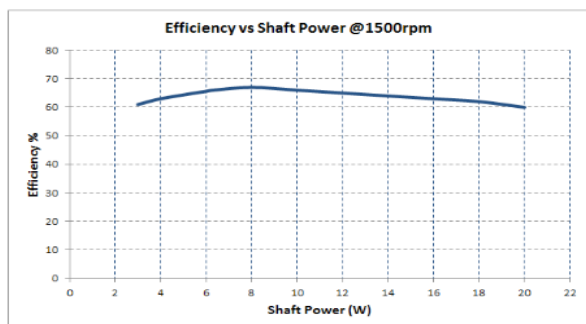

PERFORMANCE : 60Hz / 1800rpm Synchronous

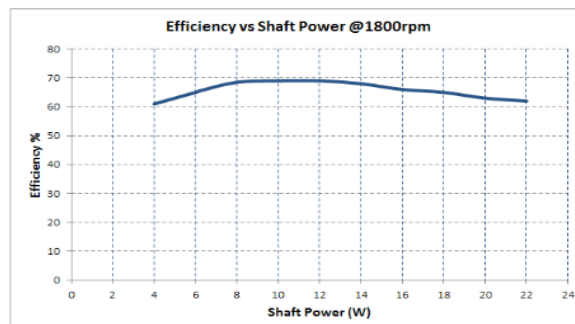

DIMENSION

