




## SPECIFICATION

<b>Rated voltage</b>	120 / 230Vac (+/-10%), 50/60Hz
<b>Temperature range</b>	-40°C to +50°C
<b>Rated current</b>	0.42A / 0.25A
<b>Absorbed power</b>	0-25W
<b>Rated speed</b>	400 to 2400rpm (+/-1%)
<b>Speed selection</b>	3 discrete programmable speeds.
<b>Direction of rotation</b>	CCW, CW, reversible
<b>Reverse Speed</b>	Timed reverse programmable options.
<b>Motor Protection</b>	Electronically / Thermally Protected
<b>Ground Protection</b>	Double Insulation
<b>Insulation Class</b>	Class B
<b>Bearing</b>	608 sealed ball bearings
<b>Approvals</b>	UL / TÜV / CE / RCM / CCC / ATEX*
<b>Ingress protection</b>	IP65 / IP67 *


\*Option on request : Please discuss with our representative.

## WIRING DIAGRAM

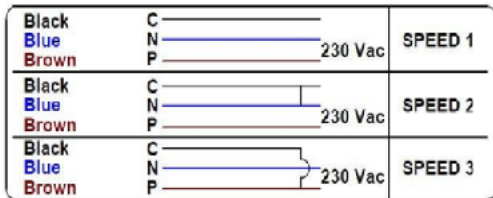

BLACK Control Wire  
BLUE Neutral  
BROWN Phase

## PERFORMANCE

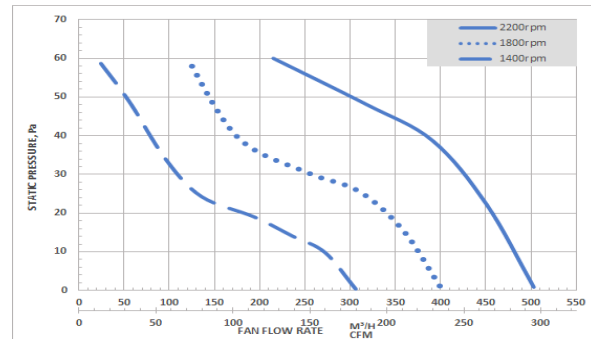

## DIMENSION

